

CPR-6622-1M1

6600W Blade Server Power Supply AC to DC Redundant



FEATURES

- High Efficiency: 96%
- Smart Fan Speed Control
- Supports up to 8 PSUs in parallel
- In-system Firmware Upload
- ★ EDPP: 180%(500µs), 150%(50ms), 110%(60ms) - repeat over 10 seconds.



■ Dimension : 245.3 x 106.5 x 82.1 mm (D x W x H)

▲ Product details and image are for reference and final product is subject to change without notice.

SPECIFICATIONS

▶ INPUT

Voltage	AC input: 180 - 264 Vac
Frequency	47 - 63Hz
Current / Inlet	5900W, 17.8~15.5A @180~207.9Vac (54V+12V) 6600W, 15.0~13.6A @239~264Vac (54V+12V)

▶ EFFICIENCY, PFC, THD

Load (%)	Input 230Vac		
	Power Factor	Total Efficiency	THD
10%	0.90	90%	20%
20%	0.96	94%	15%
40%	0.96	95%	8%
50%	0.98	96%	6%
100%	0.99	93%	6%

▶ OUTPUT

Parameter	54V	12V	12Vsb
Max Load	111A	130A	4A
Regulation	52.38 - 55.62V	11.50 - 12.60V	11.50 - 12.60V
Ripple & Noise	500mVp-p	120mVp-p	120mVp-p

▶ PROTECTION, RELIABILITY, WARRANTY

Over Current Protection (OCP)
Over Power Protection (OPP)
Over Voltage Protection (OVP)
Over Temperature Protection (OTP)
Short Circuit Protection (SCP)
ESD Protection
Holdup Time: 11msec @ 75% Load (54V and 12V)
MTBF: >500,000 hours @ 30°C
Warranty: 3 Years

▶ ENVIRONMENTAL

Temperature	Operating : 0 to 55°C Non-operating : -40 to 70°C
Altitude	Operating: to 16,500 feet (5,000 meters) Non-operating: to 35,000 feet (10,580 meters)
Relative Humidity	Operating: 20% to 90% RH, Non-condensing Storage: 5% to 95% RH, Non-condensing


SAFETY AND COMPLIANCE

UL, C-UL, CE, CQC 5000m, FCC class A, CISPR Class A, BSMI, RoHS, REACH

CPR-6622-1M1



MECHANICAL DRAWING

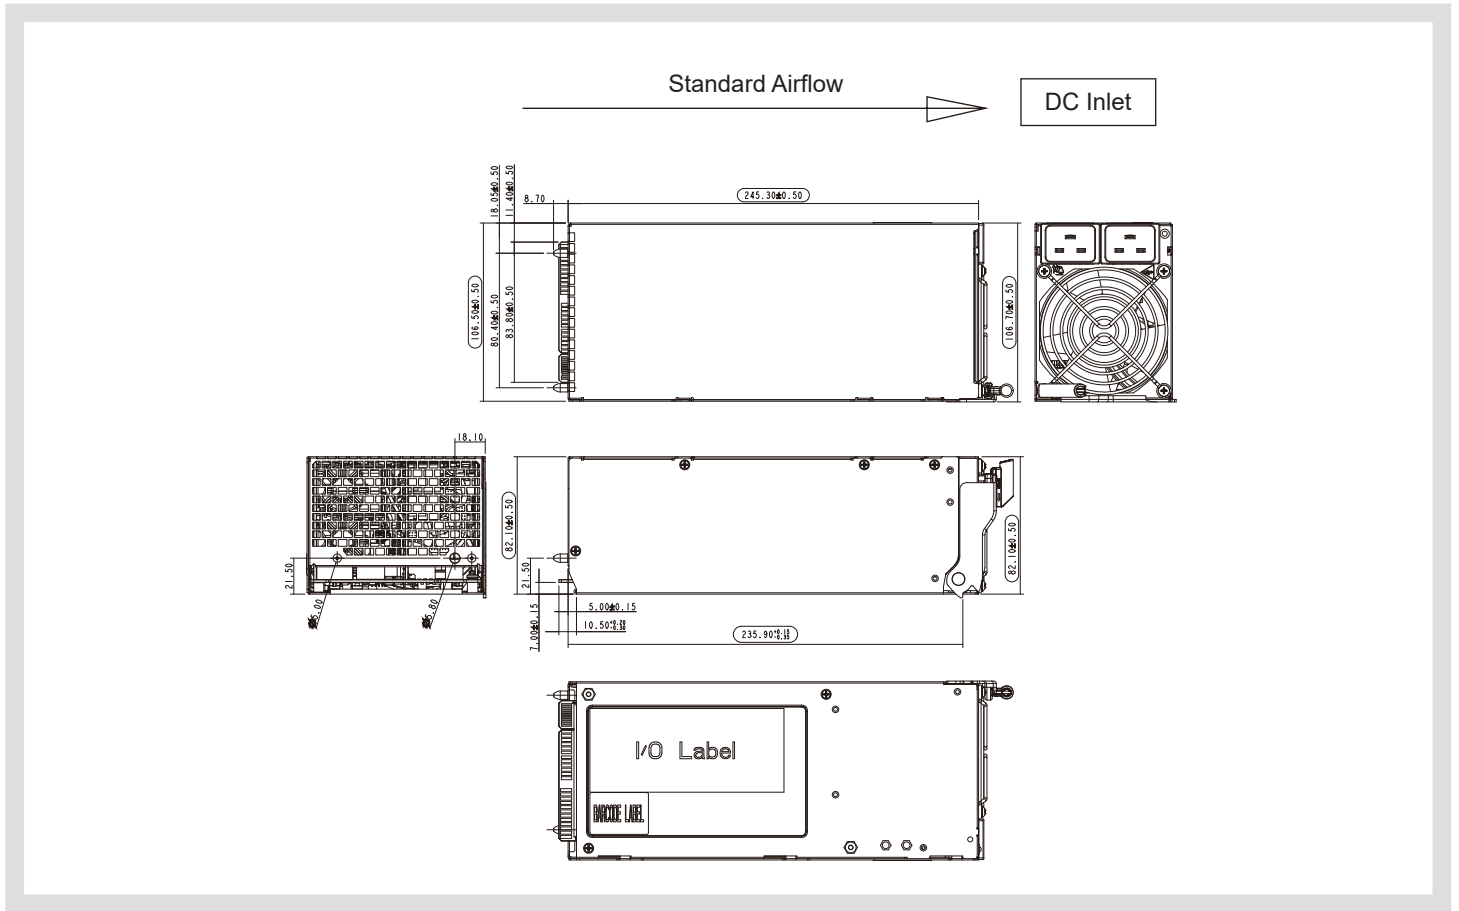

CONNECTORS

AC Inlet	2 independent IEC 320 C-20(20A / 250 VAC), (16A/250Vac VDE)
DC Output	Power edge (Gold finger)
DC Output Mating	Amphenol eHPCE 26P+22S (vertical) or (right angle)

OUTPUT CONNECTOR PIN ASSIGNMENTS

PIN#	Signal Name	PIN#	Signal Name	PIN#	Signal Name	PIN#	Signal Name	PIN#	Signal Name	PIN#	Signal Name
S1	SMBAlert	S9	+12V-RS	MP6	+54V	S22	Ishare_54V	S14	Ishare_12V	MP19	GND
S2	I2C SDA2	S10	12Vsb	MP7	Skip	S21	I2C SCL2	S13	Present_L	MP20	Skip
S3	DC GOOD	S11	12Vsb	MP8	GND	S20	PSON	S12	54V RS	MP21	54V
S4	M1_Active 1	MP1	+12V	MP9	GND	S19	M2_Active2	MP14	GND	MP22	54V
S5	I2C SCL1	MP2	+12V	MP10	GND	S18	I2C SDA1	MP15	GND	MP23	54V
S6	A2	MP3	+12V	MP11	GND	S17	A1	MP16	GND	MP24	12V
S7	Battery ID	MP4	+54V	MP12	GND	S16	A0	MP17	GND	MP25	12V
S8	Wakeup_bus	MP5	+54V	MP13	GND	S15	Reserved	MP18	GND	MP26	12V



Compuware Technology Inc.

Tel: 886-2-8226-3936 Address: 5F., No. 232, Liancheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)



www.compuware-us.com